



# วิธีกำหนดค่าไดรเวอร์ Twain

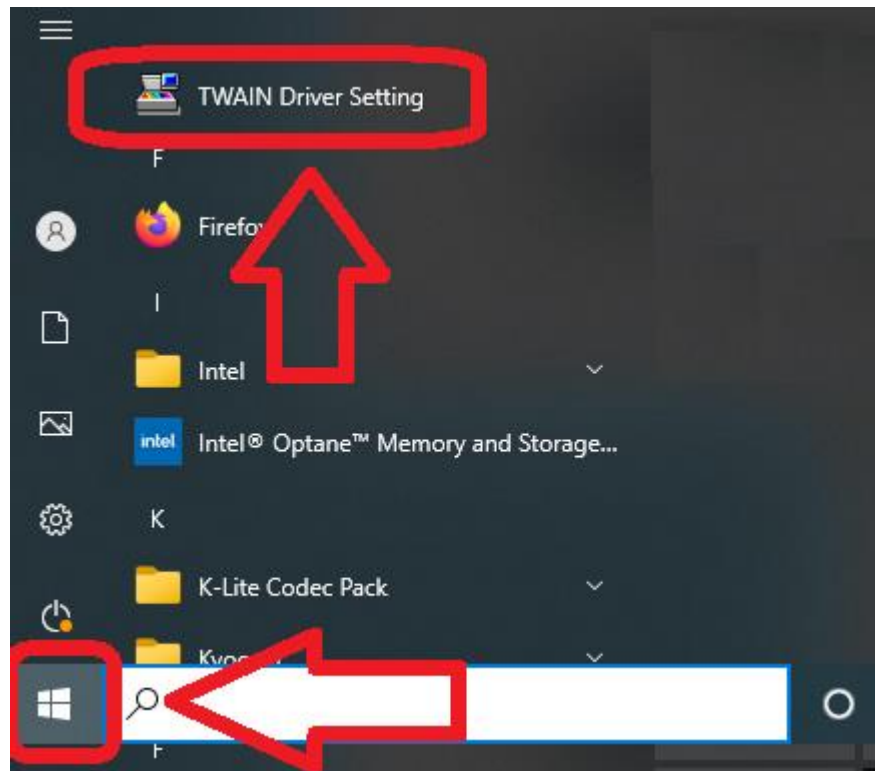

หากใช้การเชื่อมต่อ USB

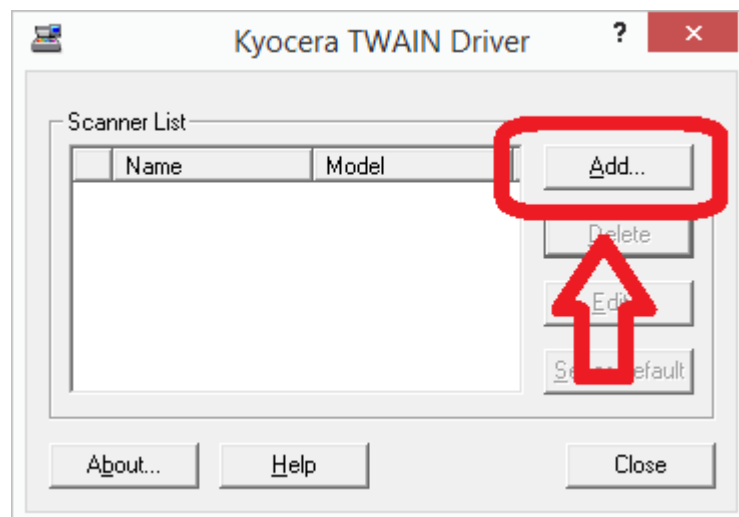

The image shows the 'Kyocera TWAIN Driver' configuration window. Red annotations highlight specific fields and buttons:

- A red arrow points down to the **Name** field, which contains 'ECOSYS M5526cdw (USB)'.
- A red arrow points up to the **Model** dropdown menu, which also displays 'ECOSYS M5526cdw (USB)'.
- A red arrow points down to the **OK** button at the bottom center.

Other visible settings include:

- Unit:** Radio buttons for 'Inch' and 'Metric' (selected).
- Image Compression(Color):** Radio buttons for 'Yes' (selected) and 'No'. Below is a 'Compression Level' slider set to 3, with 'Low' and 'High' labels.
- Image Compression(Gray / Monochrome):** Similar 'Compression Level' slider set to 3.
- Secure Protocol Setting:** A checkbox for 'SSL' which is unchecked.
- User Authentication Settings:** A button located above the 'OK' button.

1. Select the *printer model (USB)* from the **Model** list
  - not / models
2. Input a suitable value into the **Name** field
3. Select **OK**

The image shows the 'Kyocera TWAIN Driver Scanner List' window. It contains a table with the following data:

	Name	Model
✓	ECOSYS M5526cdw...	ECOSYS M5526

Buttons on the right side of the table include 'Add...', 'Delete', 'Edit...', and 'Set as default'. At the bottom of the window are buttons for 'About...', 'Help', and 'Close'.

## หากใช้การเชื่อมต่อเครือข่าย

Kyocera TWAIN Driver

Name  
ECOSYS M5526cdw (Network)

Model  
ECOSYS M5526cdw

Unit  
☐ Inch  
☒ Metric

Scanner Address  
192.168.1.200

Image Compression(Color)  
☒ Yes ☐ No

Compression Level  
3 Low High

Image Compression(Gray / Monochrome)  
Compression Level  
3 Low High

Secure Protocol Setting  
☐ SSL

User Authentication Settings

Help OK Cancel

